
# Motors Permanent Split Capacitor
# Direct Drive Fan & Blower, 5.6" Diameter, Open, Air Over

## APPLICATIONS:

Commercial and Residential Air Handlers and Furnaces.
Can replace a range of horsepower applications and a variety of mounting styles.

## FEATURES:

- Extended Mounting Studs
- Designed For Use With 370V Capacitors
- Class B Insulation
- 36" Leads
- High Efficiency Design®
- Includes Side Shell Holes For RHEEM®† Units
- Continuous Duty, Air Over
- Reversible Rotation
- Automatic Reset Thermal Overload Protector
- 2.5" Dia. Hub Rings Included

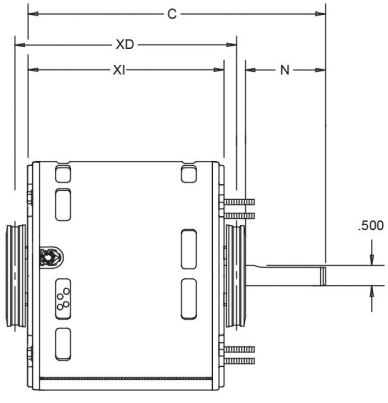


| HP | Voltage | Catalog Number | RPM | Cool Speed Tap | Heat Speed Tap | Bearings | Cap. MFD | Amps | Shaft N | Base XD | Shell XI | Total C | Ship Wt. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1/3 | 208-230 | 5469 | 825 | High | Med-Hi | SAB | 7.5 | 2.4 | 4.5 | | 5.3 | 9.8 | 18 |
| 1/4 | | | | Med-Hi | Med-Lo | | 7.5 | 1.7 | | | | | |
| 1/8 | | | | Med-Lo | Low | | 7.5 | 0.9 | | | | | |
| 1/2 | 115 | 5460 | 1075 | High | Med-Hi | SAB | 10 | 7.3 | 5.0 | 5.8 | 5.3 | 10.8 | 16 |
| 1/3 | | | | High | Med-Hi | | 7.5 | 6.9 | | | | | |
| 1/4 | | | | Med-Hi | Med-Low | | 7.5 | 5.5 | | | | | |
| 1/5 | | | | Med-Low | Low | | 7.5 | 3.6 | | | | | |
| 1/6 | | | | Low | Low | | 7.5 | 2.8 | | | | | |
| 1/2 | 208-230 | 5461 | 1075 | High | Med-Hi | SAB | 10 | 3.6 | 5.0 | 5.8 | 5.3 | 10.3 | 17 |
| 1/3 | | | | High | Med-Hi | | 5 | 3.5 | | | | | |
| 1/4 | | | | Med-Hi | Med-Low | | 5 | 2.8 | | | | | |
| 1/5 | | | | Med-Low | Low | | 5 | 1.9 | | | | | |
| 1/6 | | | | Low | Low | | 5 | 1.3 | | | | | |
| 3/4 | 115 | 5470 | 1075 | High | Med-Hi | Ball | 20 | 8.1 | 5.0 | 6.6 | 6.1 | 11.6 | 20 |
| 1/2 | | | | High | Med-Hi | | 10 | 6.6 | | | | | |
| 1/3 | | | | Med-Hi | Med-Low | | 10 | 4.6 | | | | | |
| 1/4 | | | | Med-Low | Low | | 10 | 3.8 | | | | | |
| 1/5 | | | | Med-Low | Low | | 10 | 3.1 | | | | | |
| 3/4 | 208-230 | 5471 | 1075 | High | Med-Hi | Ball | 20 | 4.1 | 5.0 | 6.6 | 6.1 | 11.6 | 20 |
| 1/2 | | | | High | Med-Hi | | 10 | 3.7 | | | | | |
| 1/3 | | | | Med-Hi | Med-Low | | 10 | 2.5 | | | | | |
| 1/4 | | | | Med-Low | Low | | 10 | 1.8 | | | | | |
| 1/5 | | | | Med-Low | Low | | 10 | 1.7 | | | | | |