
Permanent Split Capacitor Condenser Fan
5.6" Diameter, Open Drip-Proof, Air Over

APPLICATIONS:

Designed to meet manufacturer's requirements for condenser cooling fans.

FEATURES:

- High Efficiency Rated (except as noted)
- 60 Hz
- Capacitor Mounting Holes in Frame Band
- Continuous Duty, Air Over
- Water Slinger
- Designed for use with 370V Capacitors
- Automatic Reset Thermal Overload Protector
- Bearings have All Angle Thrust System
- Green Ground Lead
- Reversible Rotation
- Class B Insulation
- Extended Studs are 8-32 UNC Thread unless otherwise noted
- 30" Leads
- Double Flats on Shaft
- Enclosed Endshield at Shaft End

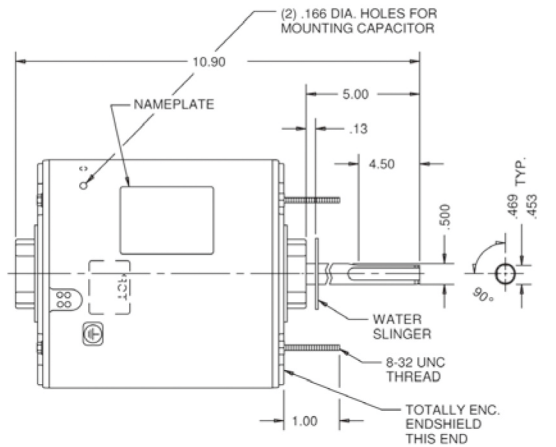

Stud Mount, Shaft Up or Horizontal, Without Capacitor

HP	RPM/ Spd.	Voltage	Catalog Number	Bearings	Cap. MFD	Amps	Shaft N	Base XD	Shell Xl	Total C	Ship Wt.	Notes
1/4	825	230	8666	SAB	5.0	1.9	6.0	5.1	4.6	11.6	14	
	1075	208-230	3851	SAB	5.0	1.7	5.0	4.4	3.8	9.9	14	62
	1075	208-230	8230	SAB	5.0	1.6	3.3	-	3.8	7.1	10	63, 72, H33, H42
1/3	825	230	8667	SAB	7.5	2.0	6.0	5.6	5.1	12.1	16	63
	1075	208-230	6880	SAB	5.0	2.2	5.0	4.9	4.3	9.4	12	62
1/2	1075	208-230	3852	SAB	7.5	3.1	5.0	5.4	4.8	10.9	15	62
3/4	1075	208-230	3097	SAB	10.0	4.8	5.0	6.6	6.1	12.1	20	
	1075	230	8665	Ball	12.5	4.4	6.0	5.9	5.3	12.4	23	
1	1080	200	8068	Ball	30.0	5.9	4.5	—	6.1	11.1	25	H9, H33
	1075	208-230	1888	Ball	15.0	5.2	6.0	6.8	6.3	13.4	25	62

LE = Lennox TR = Trane